

Sound Innovation, On Call



T2100



T2110



T2120

T2100 Series Telephones

The most versatile line of full duplex vandal-resistant telephones available.

The T2100 series of telephones are intelligent, hands-free, full duplex units that can be connected to analog telephone lines from any CO, PBX, or Key System.

The telephones are designed to withstand the rigors of harsh climates and environments, with the electronics sealed with a Mil-Spec protective coating and protected speaker and microphone openings.

Features & Benefits

- True-Talk™ Full Duplex Speaker phone
- Full ADA Compliance
- 4 Number Auto-Dial
- 2 Visual Call Progress Indicators
- Automatic Number Identifier
- Tone Feature for Patron Signaling
- 2 Programmable Auxiliary Outputs
- Remotely Programmable
- 1 or 2 Programmable Messages
- Programmable Ring Count
- Non-Volatile Memory
- AC/DC Power
- Four Hour Battery Back-Up



Electronic Micro Systems Inc.

www.electronicmicrosystems.com

125 Ricefield Lane
Hauppauge, NY 11788
Phone: (631) 864-4742

Toll Free: 800 333-3671
Fax: (631) 864-4770
E-mail: sales@emscomm.com

Special Models



T2160


4 Programmable Buttons
Customized Labeling



T2100C

Built-In Pinhole
Camera

Providing versatile
solutions for all your needs

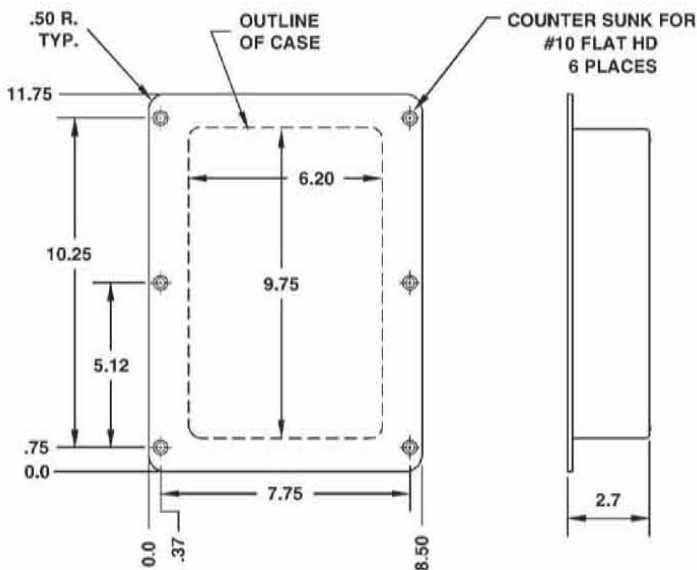

Specifications

Mechanical

- 11.75"H. x 8.5"W x 2.7"D
- Panel: 12 Ga. (.102") brushed stainless steel
- Weight: 6 lbs.
- Connectors: 2 Auxiliary outputs, 1 RJ-11, 1 power connector

Electrical

- Power: 6 to 24 V isolated DC, or powered from 110VAC converter provided
- Talk Battery: 24-56 VDC
- Loop Current Range: 11-120 Milliamps
- REN: 1.1
- Dialing: Tone or Pulse
- Frequency Response: 300HZ - 3kHz

Environmental

- Operating Temp: -20°C to +60°C (-4°F to +140°F)

Regulatory Standards

- FCC Reg. No.: 5CDUSA-30708-AL-E
- Industry Canada No.: 26817738A

Camera (T2100C Only)

- Pickup Device: 1/3" color CCD sensor (5.0mm Lens)
- Resolution: 420 (542H x 492V)
- Usable Illumination: 0.3 Lux f1.2
- Video Output: 1.0 Vp-p 75 Ohm (Connector : BNC)
- Auto-White Balance
- Power: 12VDC, 100mA (Converter included)
- Operating Temp: -5°C to +50°C (+23°F to +122°F)